JDS Metal Doorframes
21 Alloa Road
Maddington WA
AUSTRALIA 6109

Ph: +61 8 9493 3356
Fax: +61 8 9493 3358

JDS
Metal Doorframes

ABN 41 113 867 762

NEW TIMBER-LOOK PROFILE METAL DOORFRAME

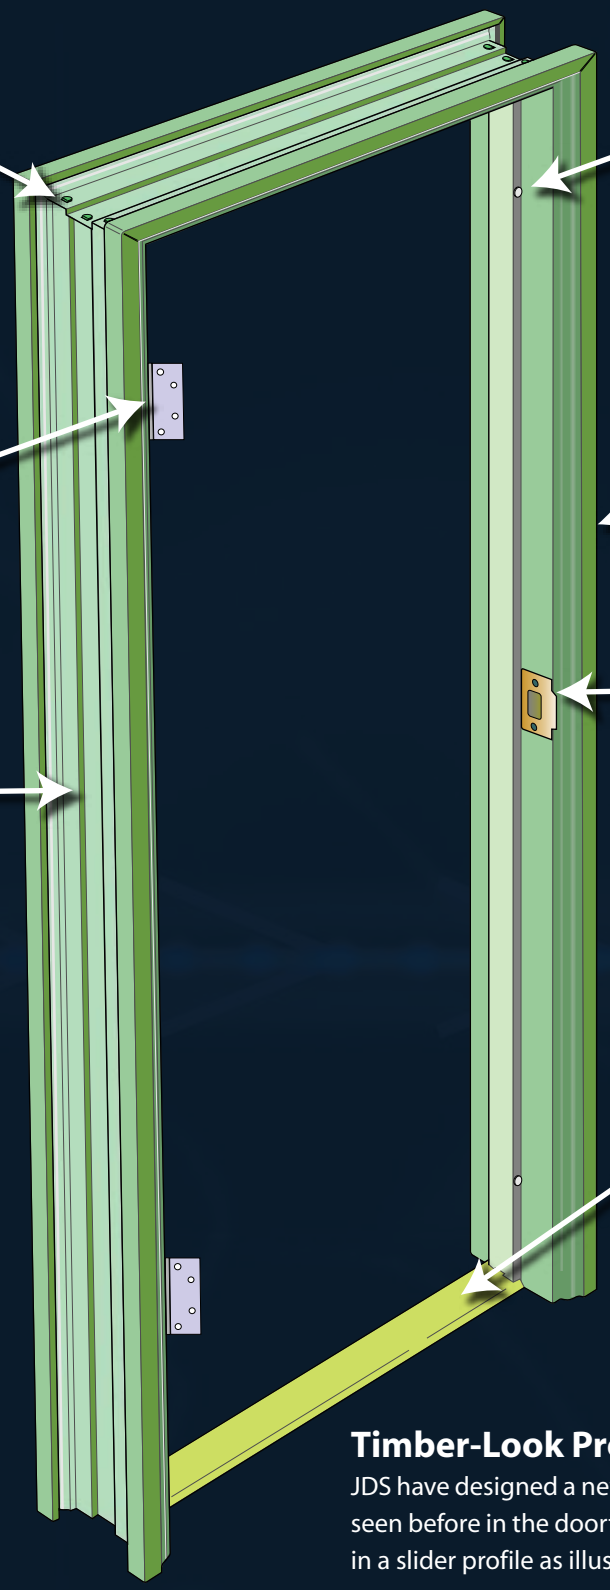

5 Point Mitre Joint

A 5 point mitre joint for superior structural strength which leaves a fantastic accurate finish.

Hinges

Standard 1.6 zinc-plated 100 x 75 hinges are used on all frames. Other hinges are available on request.

Back Openings

JDS can supply doorframes in two back openings.
95mm for Modular Bricks
114mm for Standard Bricks

Brick Ties

All frames are supplied with brick ties upon delivery.

Stud Frame Clips

Stud frame clips are available when the frame is being used with a steel wall framing system. Extra charge applies.

Rubber Buffers

Rubber buffers are used on all frames to protect the door and reduce noise.

Frame

The frame itself is made from 1.1mm ZF100 Zinc-Iron Alloy Coated Galvanneal for extra rust resistance and structural strength.

Striker Plate

The stainless steel striker is screwed into place with 2 stainless steel screws with an adjustable tongue. Also available in brass (extra charge applies). The striker is placed 1000 A.F.L. or as required.

Temporary Bottom Rail

A 1.1mm galvanised bottom rail is used for maintaining the frame's integrity during transportation and installation.

Timber-Look Profile

JDS have designed a new timber-look doorframe never seen before in the doorframe market. It is also available in a slider profile as illustrated below.



Standard Profile



Slider Profile

General Information

The frame dimensions and back openings cannot be changed. The height and width of the doorframes can be changed to meet your requirements. The maximum door thickness is 38mm. Screw fix hinges can be put onto frames. Frames can be supplied fully welded or in sausage form.

DOORFRAMES AVAILABLE EX-STOCK

Stock Frames

JDS Metal Doorframes offer a superior stock range on their doorframes. 2300 or 2340 high frames are also available in any width, but these are not available ex-stock so a two day lead time will apply.

All frames below are available in LH or RH opening.

Single 2040 High	410	420	520	620	670	720	770	820	870	920
Standard	✓	✓	✓	✓		✓		✓	✓	✓
WC Lift-off hinges	✓	✓	✓	✓		✓		✓	✓	✓
Slider Profile Frames				✓	✓	✓	✓	✓	✓	✓
3 Hinged Frames						✓		✓		
Frames with B/Butt Hinges			✓	✓		✓		✓	✓	✓
3 Hinged Frames with B/Rail								✓		
3 Hinged Frames with Deadlock								✓		

All of the above available in 95 and 114 back openings.

Std. Single Frame

Comes with 2 hinges and a standard striker.

All frames below have hinges on both sides.

Double 2040 High	2x515 (1030)	2x520 (1040)	2x615 (1230)	2x620 (1240)	2x715 (1430)	2x720 (1440)	2x815 (1630)	2x820 (1640)	2x920 (1840)
Standard	✓	✓	✓	✓	✓	✓	✓	✓	
3 Hinged Frames							✓	✓	
3 Hinged Frames with B/Rail						✓		✓	
Frames with B/Butt Hinges		✓	✓	✓	✓	✓	✓	✓	
Frames with 3 B/Butt Hinges						✓		✓	

All of the above available in 95 and 114 back openings.

Std. Double Frames

Comes with 2 hinges on both sides.

Triple 2040 High	3x520 (1560)	3x620 (1860)	3x720 (2160)	3x820 (2460)
Standard	✓	✓	✓	✓

The above frames only available in 95 back opening.

Std. Triples

Come with 6 hinges, a mullion and striker.

Quad 2040 High	4x520 (2080)	4x620 (2480)	4x720 (2880)	4x820 (3280)
Standard	✓	✓	✓	✓

The above frames only available in 95 back opening.

Std. Quads

Come with 8 hinges and a mullion.

Note:

Please note that the above are available stock items. We can make other sizes at your request. Screw fix hinges are available on request.

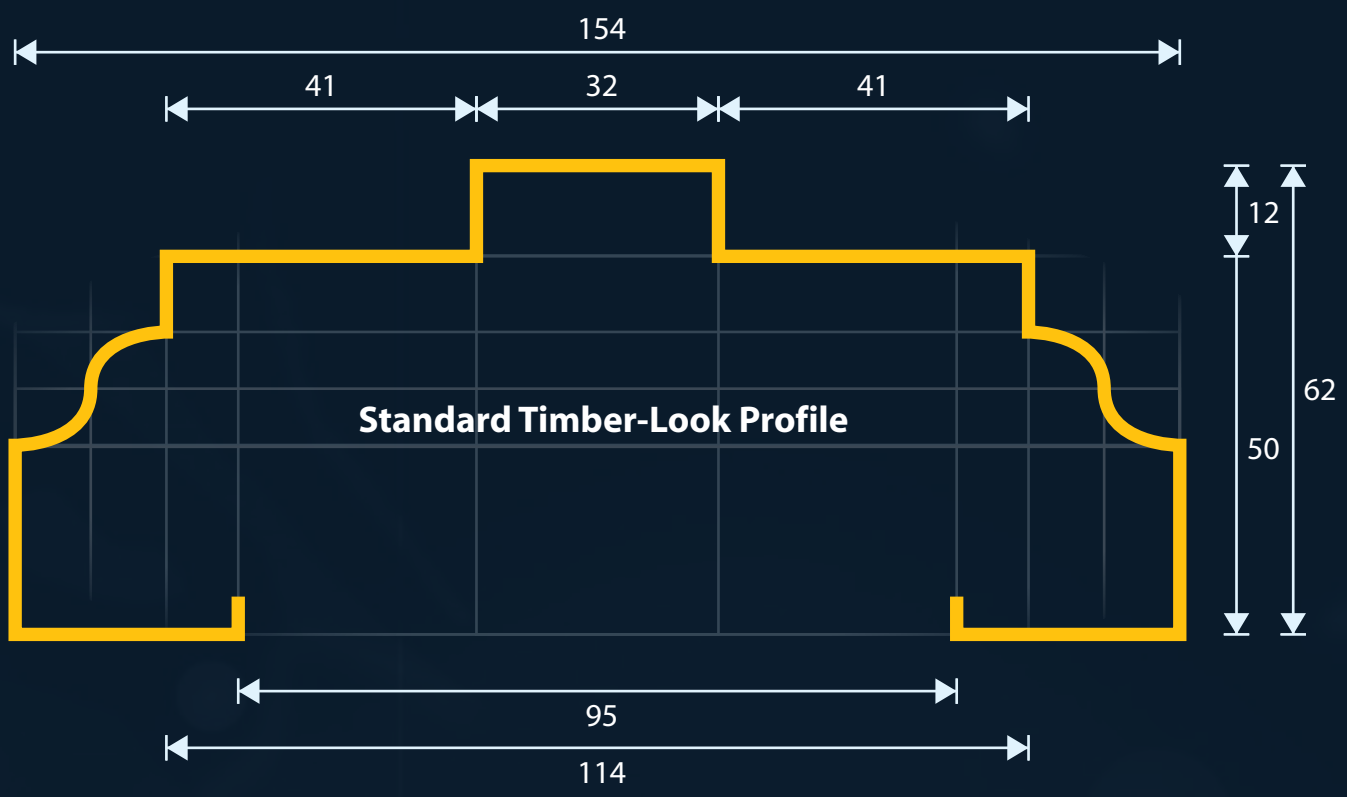

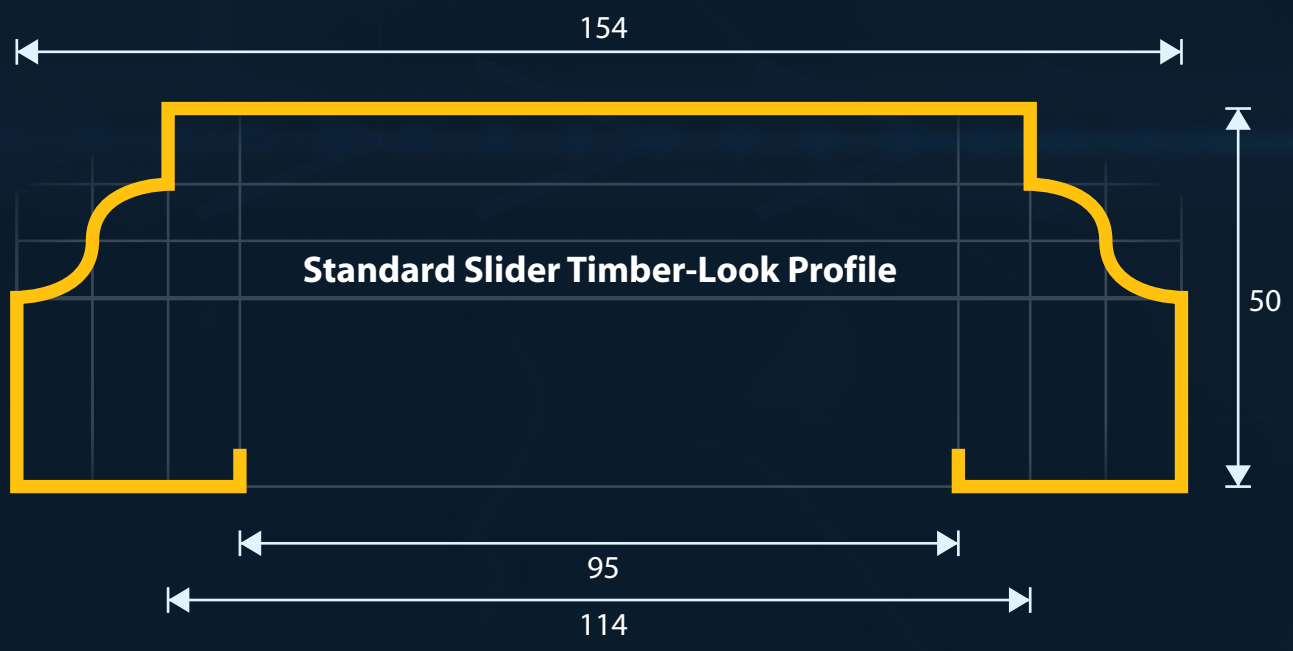

The above is a certified design and registered in the Register of Design - Design No. 303856

JDS Metal Doorframes
21 Alloa Road, Maddington WA 6109, Australia
Ph: +61 8 9493 3356 Fax: +61 8 9493 3358
www.jdsmetaldoorframe.com.au
sales@jdsmetaldoorframe.com.au